


## OVAL DIMMER SWITCH - DATA SHEET

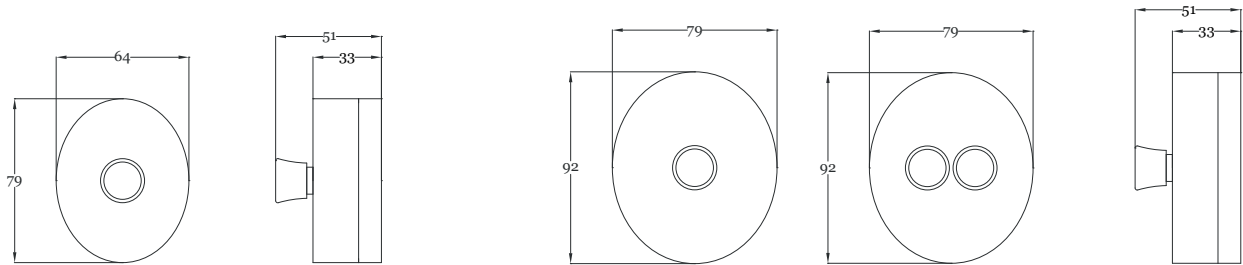

### Description

Our Oval range of dimmer switches are available in an aged brass or oxidised brass living finish with a richlite wall mounting bracket and matching screws. Casing is supplied fully assembled to dimmer modules.

### Features

- 1 Gang in Petite, 1-2 Gang in Large
- Solid brass in-house designed dimmer knob
- Soft start feature and intelligent overload protection
- Adjustable minimum brightness setting and choice of driving modes
- Suitable for dimmable LED Lighting, good quality dimmable electronic low voltage transformers and Digiflux dimmable CFLs.
- Soft start feature and intelligent overload protection
- All products printed with BS No's, ratings etc
- Surface mounted, fully encased unit

Please note: our oval switches do not cover standard British square or rectangular back boxes. For installation over an existing back box, wooden pattresses are available. Please see our installation guides for details.

### Technical Specification

<b>Module</b>	0-120W LED Rotary dimmer
<b>Supply Voltage</b>	220-250V AC, 50Hz
<b>Current Rating</b>	20A
<b>IP Rating</b>	IP00
<b>Terminal Capacities</b>	(Live) Diameter: 3.2mm/ 3 x 1.5mm <sup>2</sup>
<b>Application</b>	Surface mounted, does not require back box.
<b>Installation</b>	All products must be installed by a qualified electrician in accordance to EE wiring regulations - BS7671
<b>Safety &amp; Compliance</b>	Dimmer switch conforms to BS EN 60669-1 when assembled to the appropriate plate and installed correctly. Certified for use in the UK & Europe. CE marked.



deVOL Kitchens Ltd.