


OVAL TOGGLE SWITCH - DATA SHEET

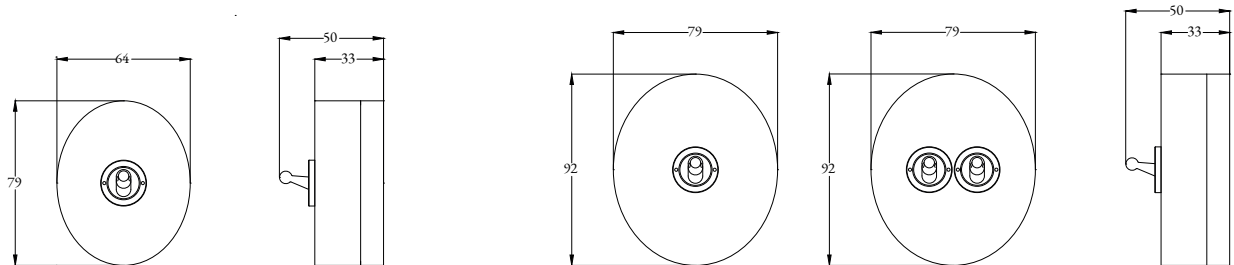

Description

Our Oval range of toggle switches are available in an aged brass or oxidised brass living finish with a richlite wall mounting bracket and matching screws. Casing is supplied fully assembled to toggle modules.

Features

- 1 Gang in Petite, 1-2 Gang in Large
- Solid brass toggle switch
- 2- way switches can be wired one or two way
- Intermediate switches available upon request
- Positive switch action
- All products printed with BS No's, ratings etc
- Surface mounted, fully encased unit

Please note: our oval switches do not cover standard British square or rectangular back boxes. For installation over an existing back box, wooden pattresses are available. Please see our installation guides for details.

Technical Specification

Module	2-way toggle
Supply Voltage	250V AC, 50Hz
Current Rating	20A
IP Rating	IP2XD
Terminal Capacities	4 x 1mm ² (Flex), 4 x 1.5mm ² (Solid), 3 x 2.5mm ² (Solid), 2 x 4mm ² (Solid), 1 x 6mm ² (Solid)
Application	Surface mounted, does not require back box.
Installation	All products must be installed by a qualified electrician in accordance to EE wiring regulations - BS7671
Safety & Compliance	Toggle switch conforms to BS EN 60669-1 when assembled to the appropriate plate and installed correctly. Certified for use in the UK & Europe. CE marked.



deVOL Kitchens Ltd.