


## CLASSIC TOGGLE SWITCH - DATA SHEET

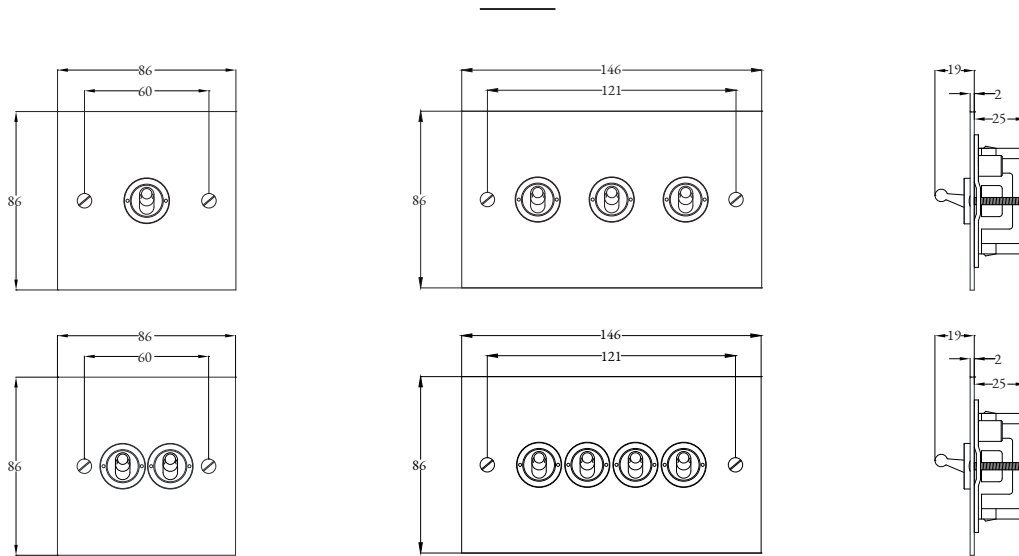

### Description

Our classic flat plate range of toggle switches are available in an aged brass or oxidised brass living finish with matching screws. Plates are supplied fully assembled to grid and toggle modules.

### Features

- 1-4 Gang
- Solid brass toggle switch
- 2- way switches can be wired one or two way
- Intermediate switches available upon request
- Positive switch action
- All products printed with BS No's, ratings etc.

### Technical Specification

<b>Module</b>	2-way toggle
<b>Supply Voltage</b>	250V AC, 50Hz
<b>Current Rating</b>	20A
<b>IP Rating</b>	IP2XD
<b>Terminal Capacities</b>	4 x 1mm <sup>2</sup> (Flex), 4 x 1.5mm <sup>2</sup> (Solid), 3 x 2.5mm <sup>2</sup> (Solid), 2 x 4mm <sup>2</sup> (Solid), 1 x 6mm <sup>2</sup> (Solid)
<b>Application</b>	Requires standard 35mm British back box BS 4662 (Max recess 25mm)
<b>Installation</b>	All products must be installed by a qualified electrician in accordance to EE wiring regulations - BS7671
<b>Safety &amp; Compliance</b>	Toggle switch conforms to BS EN 60669-1 when assembled to the appropriate plate and installed correctly. Certified for use in the UK & Europe. CE marked.



deVOL Kitchens Ltd.